


OPENING THE POLLS



1 Unwind the power cord and plug it into an AC power outlet

dominion


VOTING

Please insert Security Key to authenticate election files


LCD SW ver 102,28




2 Insert the security key into the security keypad and hold it there firmly until it is accepted.

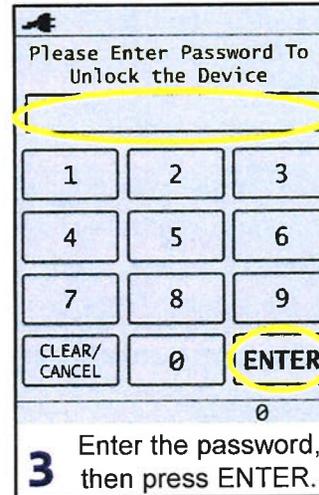


3 Enter the password, then press ENTER.

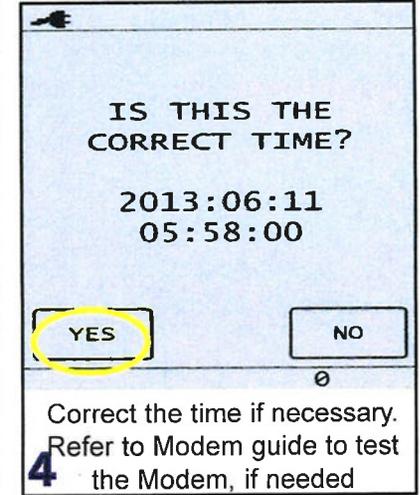

4 Correct the time if necessary. Refer to Modem guide to test the Modem, if needed

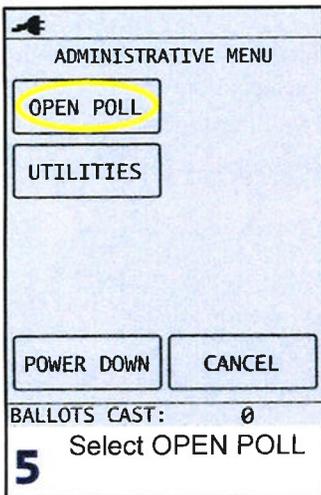


5 Select OPEN POLL

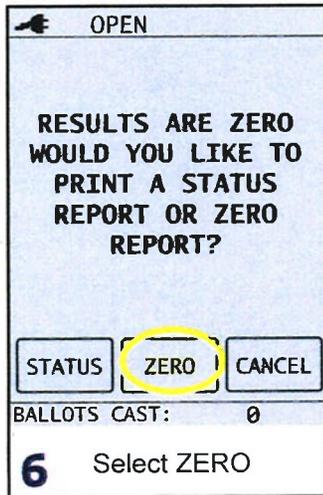


6 Select ZERO



7 The zero tape will begin printing

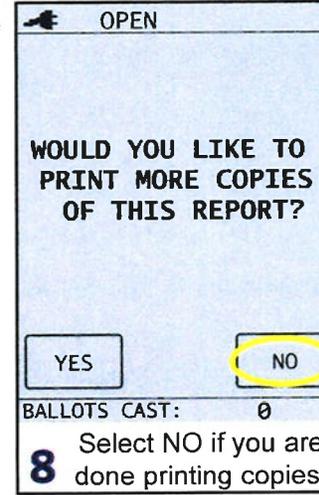

8 Select NO if you are done printing copies.

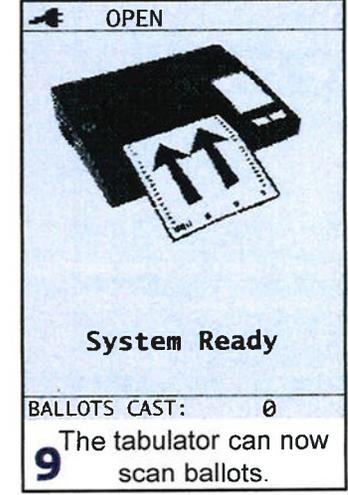

9 The tabulator can now scan ballots.